


ChemMax® 2

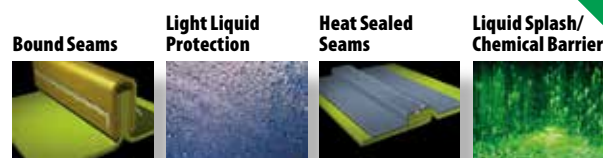

ChemMax® 2 offers quality, value, durability and the proven protection of Dow Saranex® 23P barrier film.

ChemMax® 2 is the second level of barrier protection in the new ChemMax® line of products from Lakeland Industries. ChemMax® 2 is a superior and economical chemical protective suit developed using the knowledge and expertise that you have come to expect from Lakeland. The unparalleled strength and softness of ChemMax® 2 features Dow Saranex® 23P film on two layers of a unique bi-component spunbond nonwoven substrate and provides protection for chemical mixing and handling, environmental clean up, hazardous materials remediation and response, pharmaceutical manufacturing, spray painting and general industry. ChemMax® 2 is useful in protecting against hazardous chemicals and contaminants found in the work place.

ChemMax® 2 Physical Properties

Property	Test Method	Units	ChemMax® 2
Basis Weight	ASTM D3776	oz/sy	4.3
Grab Tensile MD	ASTM D5034	pounds	47
Grab Tensile XD		pounds	33.9
Trapezoidal Tear MD	ASTM D5733	pounds	29.95
Trapezoidal Tear XD		pounds	12.47
Ball Burst	ASTM D751	pounds	48
Surface Resistance	EN1149-1:2006	Pass/Fail	Pass

Permeation Data for ASTM Recommended List of Chemicals for Evaluating Protective Clothing Materials (ASTM F1001)

Challenge Chemical	CAS Number	Physical State	ChemMax® 2
Acetone	67-64-1	Liquid	9
Acetonitrile	75-05-8	Liquid	<15
Ammonia Gas	7664-41-7	Gas	15
1,3-Butadiene Gas	106-99-0	Gas	>480
Carbon Disulfide	75-15-0	Liquid	imm.
Chlorine Gas	7782-50-5	Gas	>480
Dichloromethane	75-09-2	Liquid	imm.
Diethylamine	109-89-7	Liquid	imm.
Dimethyl Formamide	68-12-2	Gas	18
Ethyl Acetate	141-78-6	Liquid	21
Ethylene Oxide Gas	75-21-8	Gas	24
n-Hexane	110-54-3	Liquid	21
Hydrogen Chloride Gas	7647-01-0	Gas	>410
Methanol	67-56-1	Liquid	>480
Methyl Chloride Gas	74-87-3	Gas	>480.
Nitrobenzene	98-95-3	Liquid	45
Sodium Hydroxide, 50%	1310-73-2	Liquid	>480
Sulfuric Acid, 98%	7664-93-9	Liquid	>480
Tetrachloroethylene	127-18-4	Liquid	imm.
Tetrahydrofuran	109-99-9	Liquid	imm.
Toluene	108-88-3	Liquid	imm.

ND = None Detected

> = greater than

L = liquid

G = gas

Numbers reported are averages of samples tested by the ASTM F739 test method. Sample results do vary and therefore averages for these results are reported.

Warnings:

1. ChemMax® 2 is not flame resistant and should not be used around heat, flame sparks, or in potentially flammable or explosive environments.
2. Garments made of ChemMax® 2 should have slip resistant or anti-slip materials on the outer surface of boots, shoe covers or other garment surfaces in conditions where slipping could occur.

Note: Chemical Resistance Data is in accordance with ASTM F-739 test method. Testing is performed on fabric samples only, not finished garments. Sources for all test data are independent laboratory conditions and not actual use conditions.

Note: Other coverall styles or accessories may be available. Please call for details.



C44412 Bound Seam
Coverall, storm flap over zipper.
Sizes: S – 5XL
Case Pack: 12



C44414 Bound Seam
Coverall, storm flap over zipper, attached hood, boots, elastic wrists.
Sizes: S – 5XL
Case Pack: 12



C44417 Bound Seam
Coverall, storm flap over zipper, elastic wrists and ankles.
Sizes: S – 5XL
Case Pack: 12



C44428 Bound Seam
Coverall, storm flap over zipper, attached hood, elastic wrists and ankles.
Sizes: S – 5XL
Case Pack: 12



C72110 Sealed Seam
Coverall, collar, storm flap over zipper, elastic wrist and ankles.
Sizes: S – 5XL
Case Pack: 6



C72132 Sealed Seam
Coverall, respirator fit hood, storm flap over zipper, elastic face, wrists and ankles.
Sizes: S – 5XL
Case Pack: 6



C72150 Sealed Seam
Coverall hood, storm flap over zipper, elastic face, elastic wrists, and attached boots.
Sizes: S – 5XL
Case Pack: 6



C72165 Sealed Seam
Sealed Seam, coverall with respirator fit hood, double storm flap with Velcro, elastic wrists and attached sock boots and boot flaps.
Sizes: S – 5XL
Case Pack: 6