

## Summary

Product	<b>MicroMax NS Auto with knitted cuffs</b>
Description	Lightweight disposable coverall for Type 5 and 6 applications.
Fabric & weight	65 gsm Microporous film laminate with a 55 gsm SMMS polypropylene back panel.
Style *(see overleaf)	EMNC428BKC, EMNC428RKC, EMNC428WKC
Seam Type	Stitched with white CPE fabric
Colour	White with blue, red or white breathable back panel at the rear and white seams.



## CE Certification

EN Standard*	Description	Result
EN ISO 13688	Protective Clothing: General Requirements	Pass
EN 13034	Type 6: Protection against light spray of liquids	Pass
EN 13982-1	Type 5: Protection against hazardous dry particles	Pass
EN 14605	Type 3 & 4: Protection against splashes and sprays of liquid chemicals	NT
EN 1073-2	Protection against dust particles that may be contaminated with radiations	Pass
EN 14126	Protection against infectious agents	Pass (NS ONLY)
EN 1149-5	Anti-static garment requirements: (ATEX regulations exclude certification for PPE: However, both ATEX and BGR 132 / TBRS2153 reference certification to EN 1149 as a suitable measure for protective clothing for explosive atmospheres.)	1.98 x 10 <sup>7</sup>
Back Panel	<i>See safeguard 76 Technical Data Sheet</i>	

\*All Lakeland garments are certified to the latest version of standards where possible

## Mechanical Properties

EN Standard	Description	Result	EN Class
EN 13934	Tensile Strength	96.6/44.7 N	Class 2/1
EN 530	Abrasion Resistance	100 Cycles	Class 2
EN 863	Puncture Resistance	9.95 N	Class 1
ISO 2960	Burst Strength	89.4 kPa	Class 1
ISO 7854	Flex Cracking	< 100000 Cycles	Class 6
ISO 9073	Trapezoidal tear md/cd	58.1/29.8 N	Class 2/2
ISO 9073	Trapezoidal tear-mean	22 N	Class 2
EN 5082	Seam Strength	88.8 N	Class 3

## Chemical Repellency – EN 368 (for Type 6)

Chemical	EN Class	
	Repellency	Penetration
Sulphuric Acid 30%	Class 3	Class 3
Sodium Hydroxide 10%	Class 3	Class 3
O-Xylene	-	-
Butan-1-ol	-	-

## Chemical Permeation – EN 5629 – For Types 1 to 4

The chemical list below is from EN 6529 Annex A2 and is intended to provide a broad spectrum of chemical types if general chemical suit assessment

Chemical	CAS No	Result / EN Class
Acetone	67-64-1	-
Acetonitrile	70-05-8	-
Carbon Disulphide	75-05-8	-
Dichloromethane	75-09-2	-
Diethylamine	209-89-7	-
Ethyl Acetate	141-78-6	-
n-Hexane	110-54-3	-
Methanol	67-56-01	-
Sodium Hydroxide	1310-73-2	-
Sulphuric Acid (96%)	7664-93-9	-
Tetrahydrofuran	109-99-9	-
Toluene	108-88-3	-

## Key features

- Composite coverall combining excellent protection with breathable comfort
- Lakeland "Super-B" style pattern for generous sizing and ergonomic fit
- *NB: The breathable panel has a lower protection factor than the rest of the garment, so Cool Suit may not be suitable in all applications*


## Suggested applications

- Warm environments where Type 5 & 6 protection is required
- Paint spray applications
- Low level insecticide spraying
- Wet applications in GRP manufacturing
- Boat Building
- Wind-blade manufacture
- Pharmaceutical manufacture
- General maintenance and cleaning applications

## Other Information

### Lakeland Super-B Style Pattern – ergonomic design for freedom of movement, comfort and durability

All Lakeland coveralls are constructed using Lakeland’s “Super-B” style pattern. Using the company’s global knowledge and experience of protective clothing this takes European CE and North American ANSI styles to produce a garment design which combines the best elements of both to produce a garment which is generous in size yet better fitting and allows greater freedom of movement.

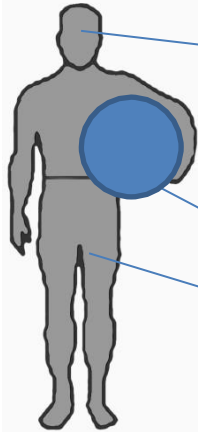


The Super-B style consists of 3 key elements:-

#### Three Piece Hood

Many cheaper garments feature a 2 piece hood. Lakeland’s 3-piece hood creates a 3D profile which fits the head better and allows greater freedom of movement. It also fits better with face masks when worn.

#### Inset Sleeves



Most European styles use a “bat-wing” style (red line) in which the under-arm reaches down to the waist. The argument is that it creates more room in the chest. However, THIS CLEARLY RESTRICTS MOVEMENT WHEN THE USERS REACHES ABOVE HIS HEAD, PLACING STRESS ON THE CROTCH AREA.

However, Lakeland use an inset sleeve (blue line) which follows the contours of the body and allows much greater freedom of movement

#### Two-piece diamond crotch gusset

Commonly garments have four seams – two body and two leg – that meet at one point in the crotch. This is a key weak point and often results in tearing and rip-outs. Lakeland inserts a two-piece diamond shaped crotch that spreads the stress and creates a more 3D fitting shape, improving wearer movement, comfort and enhancing coverall durability

The unique combination of three key elements of the Super-B style coverall makes Lakeland garments the best designed available

### Other Design Features

All Lakeland chemical suits (TomteX & ChemMAX) feature a front fastening consisting of a double layer of fabric and easy donning and doffing.

In addition ChemMAX garments (Except ChemMAX 4) feature wide double layer knee-pads to enhance comfort, durability and safety.




### Sizing



Size	Body Height	Chest
S	164-170cm	84-92cm
M	170-176cm	92-100cm
L	176-182cm	100-108cm
XL	182-188cm	108-116cm
XXL	189-194cm	116-124cm
XXXL	194-200cm	124-132cm


### Seams

Lakeland garments use 3 types of seams:-




#### Serged or Stitched

Safeguard GP  
MicroMAX NS



#### Bound

Safeguard 76 / Diamant  
MicroMAX  
Cool Suit



#### Stitched & Taped

MicroMAX TS  
TomteX  
ChemMAX

## Storage, Shelf-life and Disposal

### Storage

Lakeland garments can be stored in normal storage areas and require no special condition. Keep in cool, dry areas where possible and away from direct heat and sunlight

### Shelf-Life

Lakeland coveralls are primarily manufactured from inert polymers (usually polypropylene and/ or polyethylene which should normally degrade over longer periods in excess of 10 years. Garments are supplied in sealed bags and so a shelf life of ten years or more should be reasonable under normal conditions. However, we recommend that after 5 years Type 3 and 4 chemical suits should be disposed of and replaced or used for training only. Some discoloration of especially white fabrics may occur over time though this will not affect performance. In any circumstances it is the users’ responsibility to check garments for damage tears or wear before use

### Disposal

Polymers used in Lakeland garments are generally inert, non-harmful and non-toxic and can be disposed of by incineration or to landfill according to local regulations. However, any garments contaminated with chemicals must be disposed of according to the requirements of the chemical or cleaned before disposal